


Media

Photos



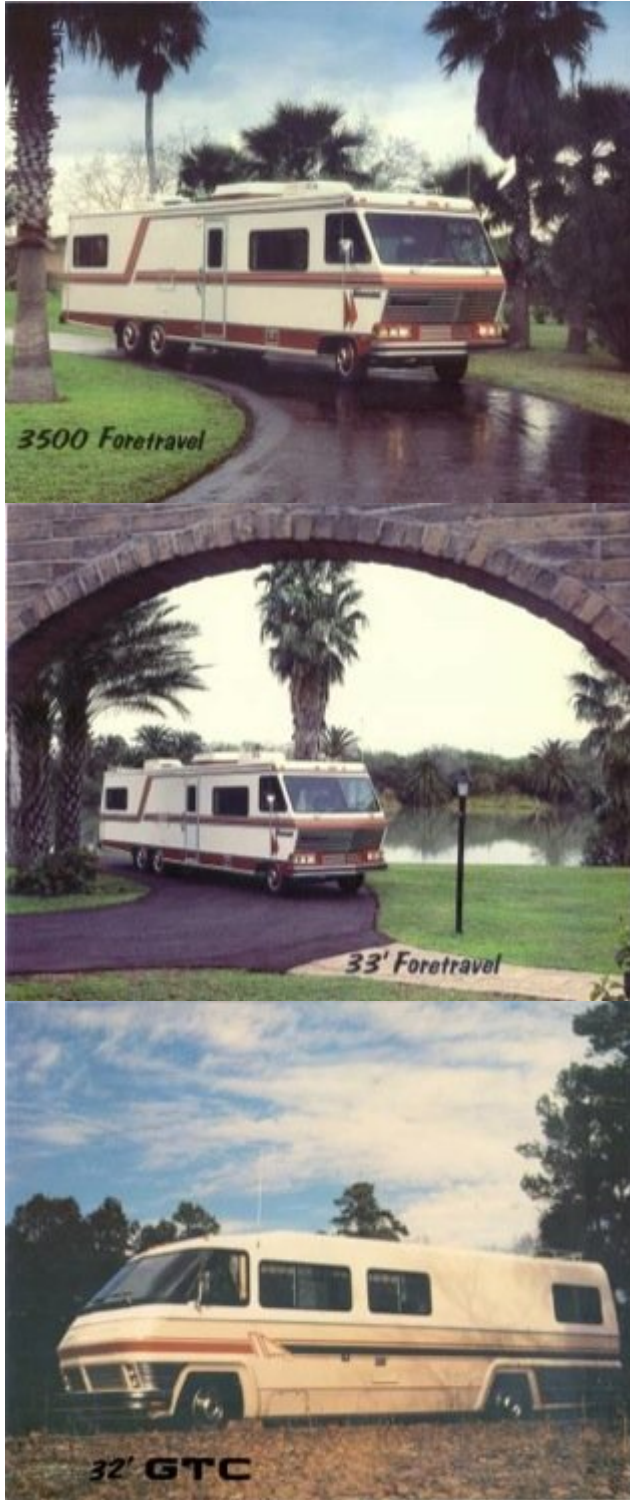

Brochures



Articles

- [38' Foretravel](#)
- [38' Performance](#)

Specifications

1984 Foretravel 38' Performance

Fuel consumption	9.2mpg
Engine coolant temp	
Level	Under 140F
Uphill	150F
Trans oil temp	
Level	170F
Uphill	185F
Acceleration time	

0-60 mph	37 sec
40-60 mph	18 sec



Fuel consumption recorded at 55 mph, 1,800 feet elevation predominantly flat highway. Ambient temperature 40 degrees F. Uphill test in 6 percent grade, full throttle.

SPECIFICATIONS

- Ext Length: 38'3"
- Ext Width: 96"
- Ext Height: 127"
- Int Height: 77"

FEATURES

- Frame Construction - Steel reinforced sandwich panel
- Insulation - 1.5" block Styrofoam
- Water Capacity - 88 gal.
- Waste Water capacity - 44 gal.
- Sink / Shower holding capacity - 45 gal.
- Propane capacity - 45.4 gal.
- Water System type - Demand
- Furnaces - 14,500 & 32,000 BTU
- Refrigerator - 10 cu. ft
- Toilet - Freshwater
- Electrical - 70 amp. Converter-charger
- Air Conditioner - Twin 13,500 BTU
- Generator - 6.5 kw
- Chassis - Oshkosh
- Engine - Caterpillar 3208-T
- Transmission - Allison MT 643 automatic 4-speed
- Axle Ratio - 4.11 to 1
- Tire size (bias) 9R/22.5 12 ply
- Wheelbase - 252"
- Brakes - Drum, air assisted
- Suspension - Air-ride
- Cooling system - HD standard
- Trans oil cooling - HD standard
- Fuel capacity - 150 gal.

WEIGHTS Wet weights ¹⁾

- Front Axle: 7540
- Rear Axle: 12940

- Right Side: 10120
- Left Side: 10360
- Total: 20480

RATINGS

- Front GAWR: 9,000 lbs.
- Rear GAWR: 17,500 lbs.
- GVWR*: 26,500 lbs.



* Owner may add up to 6,020 lbs. in weight of passengers and supplies to Motorhome equipped as test coach without violating chassis manufacturer maximum GVWR.

Base sugg. retail price \$163,500

¹⁾

Water, fuel, propane tanks full; no supplies or passengers

From:

<https://wiki.foreforums.com/> - **ForeForums Foretravel Motorcoach Wiki**

Permanent link:

https://wiki.foreforums.com/doku.php?id=through_the_years:1984

Last update: **2021/03/10 12:31**

