



FORETRAVEL MOTORCOACH

Celebrating 40th Anniversary



FORETRAVEL

The Premier
CONVERSION SHELL

The Premier

CONVERSION SHELL SPECIFICATIONS

Powertrain

- Cummins ISL 425 HP, 500 HP, 600 HP engine
- 160-amp, 260-amp, 320-amp alternator
- Drive axle ratio: 4.78:1, 4.33:1, 4.30:1
- Cummins fuel filter/water separator
- Allison transmission retarder
- Allison Gen 4 transmission MH 3000R (425 HP) or 4000R (500 HP & 600 HP)
- Transmission oil cooler

Brakes – Standard

- ABS anti-lock braking system with automatic slack adjusters
- Air disc brakes on all wheels
- Automatic traction control

Steering and Suspension – Standard

- Koni FSD shock absorbers
- HWH Computerized air-leveling system
- Illuminated Smart wheel steering wheel with tilt & telescoping
- Firestone air bags
- All air ride with Outboard-mounted air bags
- Lifiable tag axle
- Full coach lifting and lowering

Exterior Features - Standard

- 18,000 lbs rated receiver hitch
- Air quick connect in storage bay
- Air-operated entry step
- One piece roof
- Duel fuel fills
- Dual-pane insulated windows
- BASF Paint
- PTL entry door with screen and kick guard
- Storage bay lights
- Easy view one piece windshield
- Remote storage door locks
- All storage bay doors hinged at top

Dash and Cockpit Features - Standard

- AM/FM radio with CD player
- Color back-up monitor
- Backlit analogue dash gauges
- Battery boost switch
- Cruise control with dash indicator light
- Driver cup holder
- Shade band at top of windshield
- Automotive compass and outdoor temperature system
- Illuminated dash panel
- Pilot light
- Synchronized windshield wipers
- Touch-pad transmission gear selector
- Villa leather 6-way power pilot seat
- 12v accessory receptacle
- Adjustable throttle and brake pedals


Safety Features - Standard

- Daytime running lights
- Dual halogen headlamps
- Auxiliary rear brake lights and turn signals
- Emergency flasher lights
- Fire extinguisher
- High-mounted additional brake lights
- Interior exit-assist handle
- Lighted entry door with assist handle, keypad, & doorbell
- Marker lights
- Heated and Remote triple-head mirrors w/LED turn signals
- Air Horns

Tires and Wheels - Standard

- Goodyear 295/80R22.5
- Alcoa aluminum wheels w/ Dura-Bright protection 4 - 36' & 38', 6 - 40', 42', & 45"

| Model | 336 | 338 | 340 | 342 | 345 |
|---|-------------|-------------|-------------|-------------|-------------|
| TravelRide Chassis | STD | STD | STD | STD | STD |
| Semi Monoqueue Body Structure | STD | STD | STD | STD | STD |
| Overall Length | 36' 4.5" | 38' 4.5" | 40' 4.5" | 42' 4.5" | 44' 11" |
| Wheelbase | 228" | 252" | 252"/302" | 276"/326" | 304"/353" |
| Width | 102" | 102" | 102" | 102" | 102" |
| Height without A/C | 136 13/16" | 136 13/16" | 136 13/16" | 136 13/16" | 136 13/16" |
| Height with A/C | 146 5/16" | 146 5/16" | 146 5/16" | 146 5/16" | 146 5/16" |
| Height with SAT DISH | 150 1/16" | 150 1/16" | 150 1/16" | 150 1/16" | 150 1/16" |
| Floor to Ceiling Height | 85 3/8" | 85 3/8" | 85 3/8" | 85 3/8" | 85 3/8" |
| Under Floor Storage | 236 cu. Ft. | 275 cu. ft. | 314 cu. ft. | 353 cu. ft. | 392 cu. ft. |
| Entrance Door Width | 27" | 27" | 27" | 27" | 27" |
| Step Height | 16" | 16" | 16" | 16" | 16" |
| Ground Clearance Front (Bottom of Axle) | 9 3/4" | 9 3/4" | 9 3/4" | 9 3/4" | 9 3/4" |
| Ground Clearance Middle | 13 1/2" | 13 1/2" | 13 1/2" | 13 1/2" | 13 1/2" |
| Ground Clearance Rear (Bottom of Axle) | 9 3/4" | 9 3/4" | 9 3/4" | 9 3/4" | 9 3/4" |
| Overhang Front | 81" | 81" | 81" | 81" | 81" |
| Overhang Rear - from center of drive | 128" | 128" | 150" | 150" | 150" |
| Turning Radius - with tag raised | 39' 2" | 43' 5" | 41' 11" | 46' | 52' 4" |
| Fuel Tank | 120 gal | 120 gal | 145 gal | 145 gal | 200 gal |
| GCWR | 51,000 lbs | 51,000 lbs | 60,000 lbs | 60,000 lbs | 60,000 lbs |
| GVWR | 34,800 lbs | 34,800 lbs | 46,800 lbs | 46,800 lbs | 48,300 lbs |
| Front Axle | 14,800 lbs | 14,800 lbs | 14,800 lbs | 14,800 lbs | 15,300 lbs |
| Rear Drive Axle | 21,000 lbs | 21,000 lbs | 32,000 lbs | 32,000 lbs | 32,000 lbs |
| Tag Axle | NA | NA | 11,000 lbs | 11,000 lbs | 11,000 lbs |

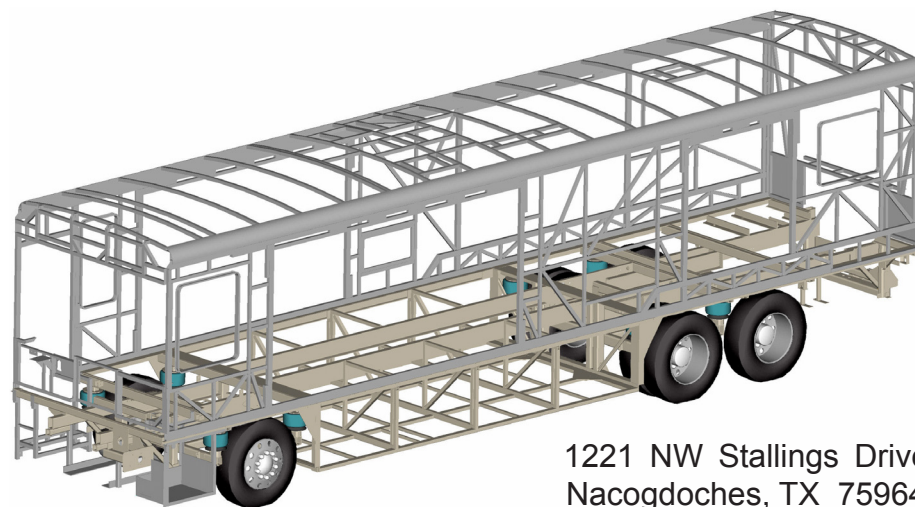

1221 NW Stallings Drive
Nacogdoches, TX 75964

These specifications are based on the latest product information available at the time of printing 6•8•2007

For a full list of standards, options & pricing contact Fred Hoke at fred.hoke@foretravel.com or 936-560-8417

www.foretravel.com